

Mapeband TPE

TPE tape for flexible sealing and waterproofing expansion joints and over cracks subject to movement



WHERE TO USE

Waterproofing expansion joints in road-works, tunnels, hydraulic works and covering areas subject to movement up to 5 or 10 mm, using **Mapeband TPE 170** or **Mapeband TPE 325** respectively.

Some typical application examples:

- Flexible waterproofing seal of expansion joints subject to large amounts of movement in service.
- Flexible waterproofing seals in tunnels, road-works, etc.
- Sealing expansion joints in prefabricated panels.
- Sealing structural joints in façades.
- Sealing joints in hydraulic works, such as channels, basins, drains, pipe-work, etc.
- Waterproofing joints in road-works.
- Waterproofing expansion joints in flat covering layers.

TECHNICAL CHARACTERISTICS

Mapeband TPE consists of either 17 cm or 32.5 cm wide tape, called respectively **Mapeband TPE 170** and **Mapeband TPE 325**, 1.2 mm thick, sidelong reinforced with polyester non-woven fabric. **Mapeband TPE** must be applied by bonding with **Adesilex PG4** two-component, low viscosity, thixotropic epoxy adhesive, or **Mapelastic** two-component flexible cementitious mortar.

TPE, short for “Elastomeric Thermoplastic Polyolefine”,

is the name given to a special group of polyolefines which combine the best properties of thermoplastic polymers and synthetic elastomer technology.

Mapeband TPE may be joined by using the “cold-weld” technique by applying a contact adhesive, such as **Adesilex LP** solvented, poly-chloroprene adhesive, to both surfaces. This technique makes it easy to form linear joints or to create special pieces with the tape, to guarantee the waterproof integrity of the entire system. The tape remains permanently flexible and deformable even at low temperatures and, furthermore, it is resistant to ageing even if exposed to atmospheric agents and UV rays.

The composition of **Mapeband TPE** gives it excellent resistance to alkalis, bitumen, diluted lye, slightly acidic solutions and salt solutions.

RECOMMENDATIONS

- Do not use **Mapeband TPE** if it will come into contact with mineral oil, petrol or strong solvents (ketones, esters and hydrocarbons).
- Do not lay **Mapeband TPE** on surfaces which are not perfectly clean, dry or which are irregular.
- Protect **Mapeband TPE** against perforation.
- Only use the “cold-welding” technique to join different pieces of tape.

APPLICATION PROCEDURE

Preparation of the substrate

Surfaces on which **Mapeband TPE** is to be applied

Mapeband TPE

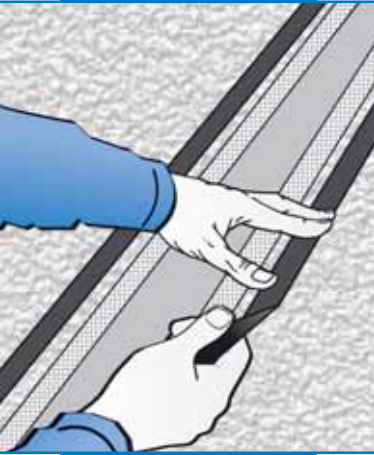


Fig. 1

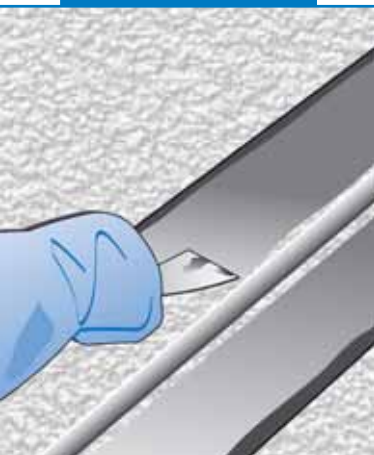


Fig. 2



Fig. 3

must be free from oil, grease and paint and must be free from dust and areas which are either uneven or loose.

Paintwork or toppings must be removed by sandblasting or with a sanding disc. This operation is indispensable if the surfaces have been treated with polyester, epoxy or polyurethane resin or if it is made from glassy material.

If **Mapeband TPE** is to be applied on metallic surfaces, remove all traces of rust, paint, grease, etc. by sandblasting down to bare metal.

When **Mapeband TPE** is applied, the surface must be perfectly dry.

To obtain a joint with a clean, well-defined profile, apply masking tape around the outside surface of the joint, in order to obtain an area which is 1 cm wider than the width of the TPE tape to be spread with adhesive (fig. 1). After laying, bonding and finishing off with a trowel, remove the masking tape.

Products to use for bonding

Adesilex PG4 or **Mapelastic** (choose which product to use according to the kind of work to be carried out).

Preparation of Adesilex PG4 adhesive

The two components which make up **Adesilex PG4** must be mixed together.

Pour component B (white-coloured catalyst) into component A (grey) and mix together with a low-speed drill fitted with a mixing attachment until a homogenous mix is obtained (uniform grey colour).

The packages are pre-dosed. Therefore, do not use only partial quantities of the two components in order to avoid errors when calculating the mixing ratio; this could lead to poor or incomplete hardening of the product. If only partial quantities of the components are used, use a high-precision electronic balance.

Mapeband TPE may also be bonded with **Mapelastic** if used for waterproofing terraces.

Preparation of Mapelastic

Pour component B (liquid) into a suitable, clean container. Then slowly add component A (powder) while stirring with a mechanical mixer.

Carefully mix **Mapelastic** for a few minutes, making sure that no powder remains stuck to the sides or the bottom of the container.

Keep stirring until a perfectly homogenous mix is obtained.

Use a low-speed mechanical mixer for this operation to avoid entraining too much air into the mix. Do not prepare the mix by hand.

For further details, please consult the technical data sheets for the aforementioned products.



Fig. 4



Fig. 5

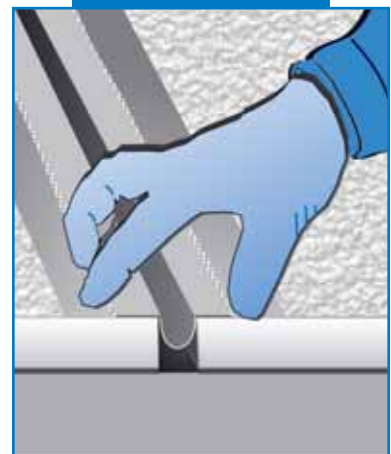


Fig. 6

TECHNICAL DATA (typical values)

PRODUCT IDENTITY

Colour:	grey
Sizes available:	17 cm (Mapeband TPE 170) 32.5 cm (Mapeband TPE 325)
Width of expansion area (mm): – Mapeband TPE 170: – Mapeband TPE 325:	50 165
Thickness (EN 1849-2) (mm):	1.2
Customs class:	3921 90 90

FINAL PERFORMANCES

Breakage strength (EN ISO 527-1) (N/mm²):	> 4.5
Elongation at breakage (EN ISO 527-1) (%):	> 650
Low-temperature bending (SIA V280/3) (°C):	< -30
Resistance to atmospheric agents and ultraviolet rays (SIA V280/10) (h):	> 5000
Resistance to roots (SIA V280/11):	no root penetration
Inflammability class (DIN 4102/1):	B2
Waterproofing level (EN 1928-B) (N/mm²):	≤ 0.6
Water vapour diffusion resistance coefficient (SIA V280/6) (μ):	approx. 30000
Perforation resistance (SIA C280/15) (500 g from dropped height) (mm):	> 500
Resistance to temperature:	from -20°C to +80°C
Maximum elongation of expansion zone (mm): – Mapeband TPE 170: – Mapeband TPE 325:	5 10

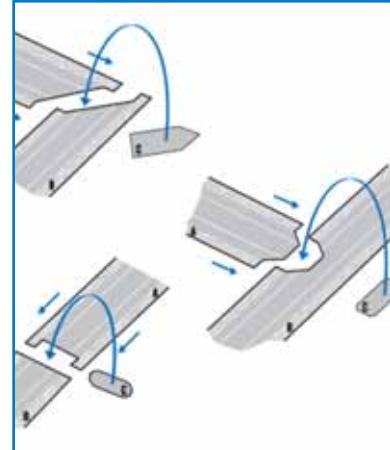


Fig. 7

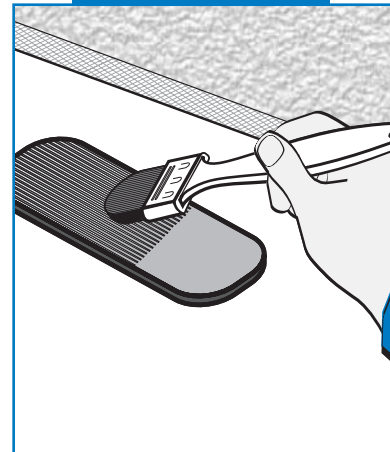


Fig. 8

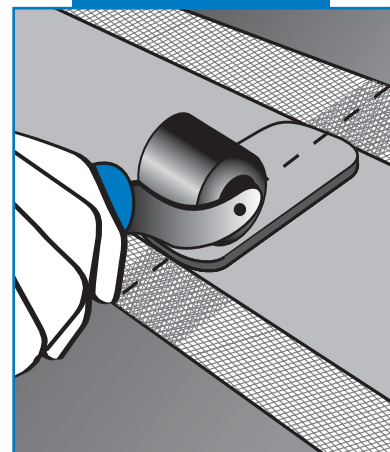


Fig. 9

Bonding the product

Firstly apply a 1-2 mm-thick uniform layer of **Adesilex PG4** or **Mapelastic** onto the clean, dry substrate with a smooth spatula; avoid applying the adhesive inside the joint (fig. 2).

Lay **Mapeband TPE** by pressing lightly along the non-woven sides of the tape. Make sure that all wrinkles and creases are eliminated and that air bubbles are not formed (fig. 3). Apply a second layer of **Adesilex PG4** or **Mapelastic** while the first one is still fresh, completely covering the fabric strip with the new layer of adhesive (fig. 4). Smooth off the product with a flat trowel.

Once the second layer of **Adesilex PG4** or **Mapelastic** has been applied, slowly remove the masking tape (fig. 5).

Mapeband TPE must be protected against damage (e.g. perforation) during the application process.

If high levels of movement are foreseen, **Mapeband TPE** must be laid by forming an upside-down “Ω” (omega) shape on the inside of the joint.

Joints between strips of **Mapeband TPE** must be carried out as illustrated in fig. 7, according to the type of joint to be formed (butt, corner or “T” joint).

Butt joints or “T” joints between two strips of **Mapeband TPE** must be carried out by overlapping and bonding the central part in TPE for at least 5 cm, using **Adesilex LP** (fig. 8).

Mapeband TPE

To make the welding of the parts in TPE easier and firmer, press lightly with a flat carpeting roller (fig. 9).

PACKAGING

Mapeband TPE is supplied in boxes and is available in two sizes:

- Mapeband TPE 170 (width 17 cm):
30 m x 17 cm rolls;
- Mapeband TPE 325 (width 32.5 cm):
30 m x 32.5 cm rolls.

FOR PROFESSIONALS.

WARNING

While the indications and guidelines contained in this data sheet correspond to

the company's knowledge and wide experience, they must be considered, under all circumstances, merely as an indication and subject to confirmation only after long-term, practical application. Therefore, anybody who undertakes to use this product, must ensure beforehand that it is suitable for the intended application and, in all cases, the user is to be held responsible for any consequences deriving from its use.

**All relevant references
of the product are available
upon request**

